
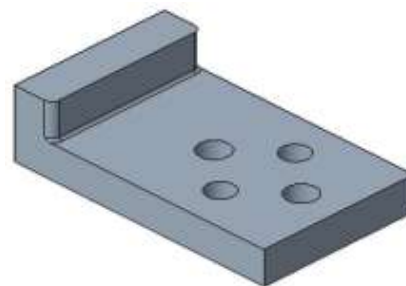




▶ POSITIVE RETURN FOLLOWER (PCU-CA30)

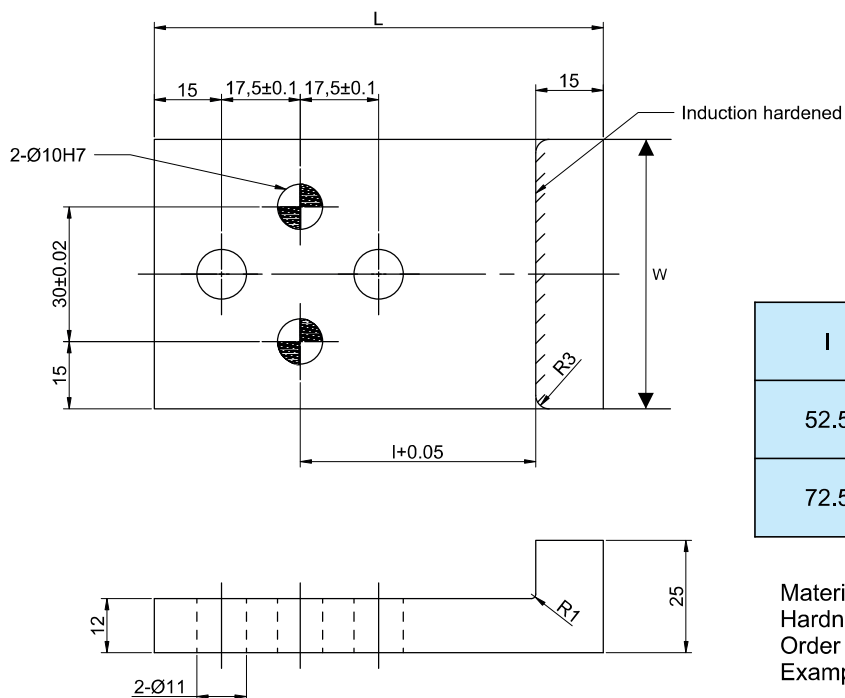

I	Catalog No.	(W)	L
52.5	PCU-CA30	60	100
72.5			120

Material : EN8
 Hardness : 55 HRC (Induction hardened)
 Order Type : PCU-CA30-W-L
 Example : PCU-CA30-60-100

▶ POSITIVE RETURN FOLLOWER (PCU-CA31)B

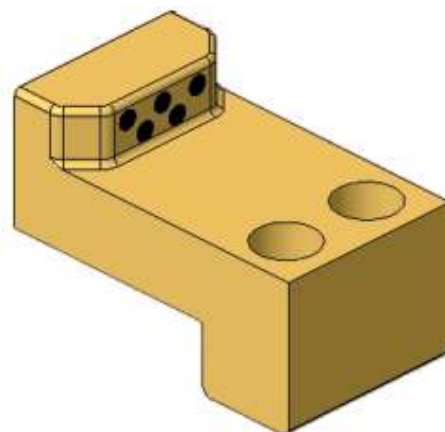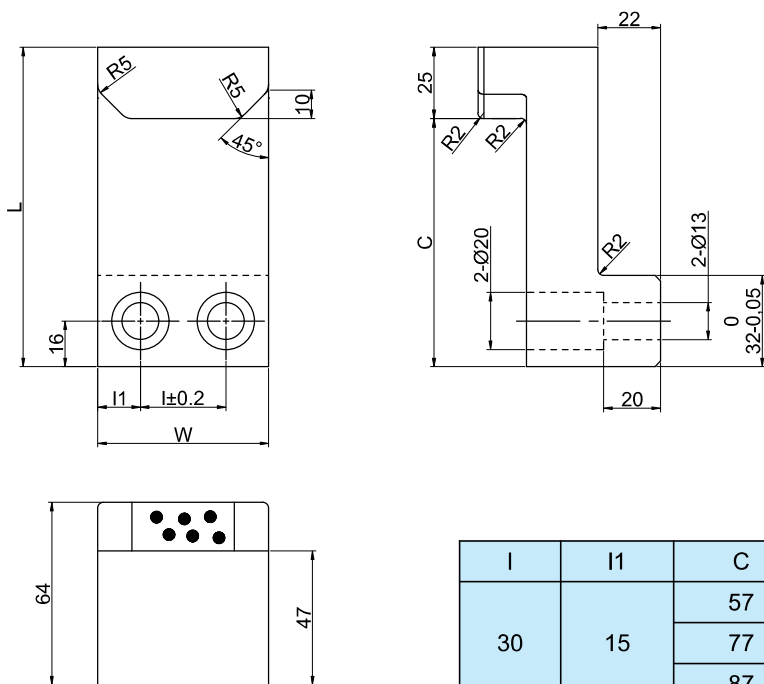

I	I1	C	Catalog No.	W	L
30	15	57	PCU-CA31	60	82
		77			102
		87			112
40	20	57		80	82
		77			102
		87			112

Material : Copper alloy
 Special solid lubricant (embedded)
 Order Type : PCU-CA31-W-L
 Example : PCU-CA31-60-102