




▶ UPPER PLATE (PCU-CA39)B,C,S


- W=25
- W=33, L=75~150
- W=52, L=100



- W=150, L=200
- W=>52, L=250

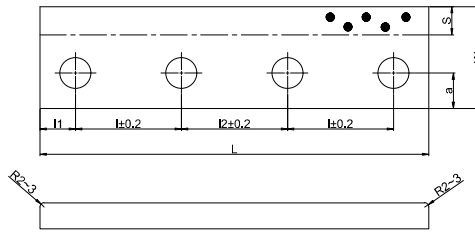

- W=33, L=200
- W=>52, L=150~200



l	l	l2	a	S	d	T	Catalog No.	W	L
45	15	-	8	7.5	9	10	PCU-CA39 Type B	25	75
50	100								
75	125								
45	15	-	12.5	9	11	10	PCU-CA39 Type B	33	75
50	100								
75	125								
100	25	-	20	13	13	20	PCU-CA39 Type B Type C Type S	52	150
75									200
50									250
50	25	50	25	22	18	30	PCU-CA39 Type B Type C Type S	72	100
75									150
50									200
75	25	50	25	27	18	35	PCU-CA39 Type B Type C Type S	77	200
50									250
75									250
50	25	50	25	32	18	40	PCU-CA39 Type B Type S	82	150
75									200
50									250
50	25	50	25	32	18	40	PCU-CA39 Type B Type S	105	150
75									200
75									250

Material : Copper alloy Special solid lubricant (embedded)
 Order Type : PCU-CA39-W-L-Type
 Example : PCU-CA39-125-100-B

Material : EN8 Special solid lubricant (embedded)
 Hardness : 40HRC~(Induction hardened)
 Order Type : PCU-CA39-W-L-Type
 Example : PCU-CA39-52-100-C

Material : FC260 Special solid lubricant (embedded)
 Order Type : PCU-CA39-W-L-Type
 Example : PCU-CA39-72-150-S

